

FISCO 


Hultafors



TOOLS TO RELY ON

“Function and precision that you can rely on”

Ask any craftsman you like. They’ll tell you – “If you want the real deal, it has to be Fisco.” You can rest assured that by choosing a Fisco tape measure, you are getting a tape that delivers the best possible function, reliability and precision. Tapes that can take all the hard knocks, are durable and, more to the point, feel right in your hand.

The reason for this is quite simple. We develop all our products in conjunction with professionals. We understand their work situation and listen to their needs. They are involved in testing the products until everyone is happy with the results. For us, this is the only way of being sure that our tapes actually work and make your job easier.

The knowledge we have of your workday and that of other craftsmen is undeniably unique. As is our extensive experience. It all began in 1940 when Leo Fisher started Fisco in a small cellar in London during World War II. Since then we have spent more than 70 years perfecting our world-renowned tape measures. In 2008 Fisco was acquired by Hultafors Group, a Swedish hand tools company, that we have had a very close relationship for over two decades. Hultafors is known for its innovative hand tools that have been used by Scandinavian and European craftsmen since the late 19th century. The assortment consists of a full range of functional and ergonomic products from measuring devices, wrecking bars, hammers, knives and spirit levels.

Being part of a larger organization will mean more resources, a larger knowledge and worldwide markets to operate in. This will benefit not only ourselves but certainly all our end-users.

Gary Beadon

Managing Director, Fisco Tools



During April 2015, Fisco became a member of the Made in Britain campaign, which allows us to identify our British made products with the official Made in Britain marque. The marque can be applied to our literature, website and packaging and enables our customers to identify British made products whilst supporting and promoting British manufacturing in the UK and overseas. The logo can be seen throughout our catalogue.

The history of the campaign

Research had shown that consumers wanted to buy British made products but were often confused by the origin of products sold in stores. In 2011, independent market research was carried out among 1000 British adults. The results showed that half of those surveyed admitted confusion during the purchase process, whilst two-thirds wanted an official seal of approval to identify Made in Britain products. By October 2012, 600 companies were using the marque.

Mission statement and objectives

- To be the definitive Made in Britain campaign, endorsed by government, supported by manufacturers and recognised by consumers, at home and abroad.
- To sign up 1000+ UK manufacturers to use the Made in Britain marque.
- To lobby MPs and Peers to raise our profile and gain Government endorsement.
- To promote the campaign in the media and showcase our members.
- To understand and respond to the needs of our members and support their sales efforts.

For further information, please visit:

www.madeingb.org

WORLD CLASS A

FISCO 

CUTTING EDGE IN TAPE TECHNOLOGY

Setting higher standards in measuring tools, Fisco's high-tech manufacturing facility in South East England today covers over 60,000 square feet and produces over 1,500 high quality measuring instruments every hour.

Innovative product design and sophisticated manufacturing techniques are achieved through the active association of the product development team with specialist designers and engineers. This, combined with the use of high quality materials and rigorous inspection at all stages of manufacture produces a range of tapes with an accuracy that is second to none.

Quality Assurance

Fisco is a registered company under the TÜV NORD CERT 9001:2008 Quality Assurance Scheme.

High Precision Printing


Fisco is at the cutting edge of tape technology and has developed the world's only high precision ink-jet tape printer which guarantees precise alignment and the highest standards of measuring accuracy. The matt polyester top surface used



on Fisco blades, reduces reflection making a visible difference when compared to many competing products. Metric tapes are produced to accuracy levels laid down in the Measuring Instruments Directive 2004/22/EC, marked with the stipulated CE markings and appropriate accuracy levels. Metric/Imperial tapes are produced to the same level of accuracy.

Calibration Service

On Pacer 30m and 50m long tapes a calibration service is offered giving the customer the assurance of the absolute precision of their own individual tapes. Calibrated tapes are carefully checked against a precision master scale and any deviation is noted. One calibrated tape can be used as a benchmark to ensure the maintained accuracy of other tapes. All calibrated tapes are certified EC Class I, and are supplied with 'A' endings. Calibration can be varied to suit individual

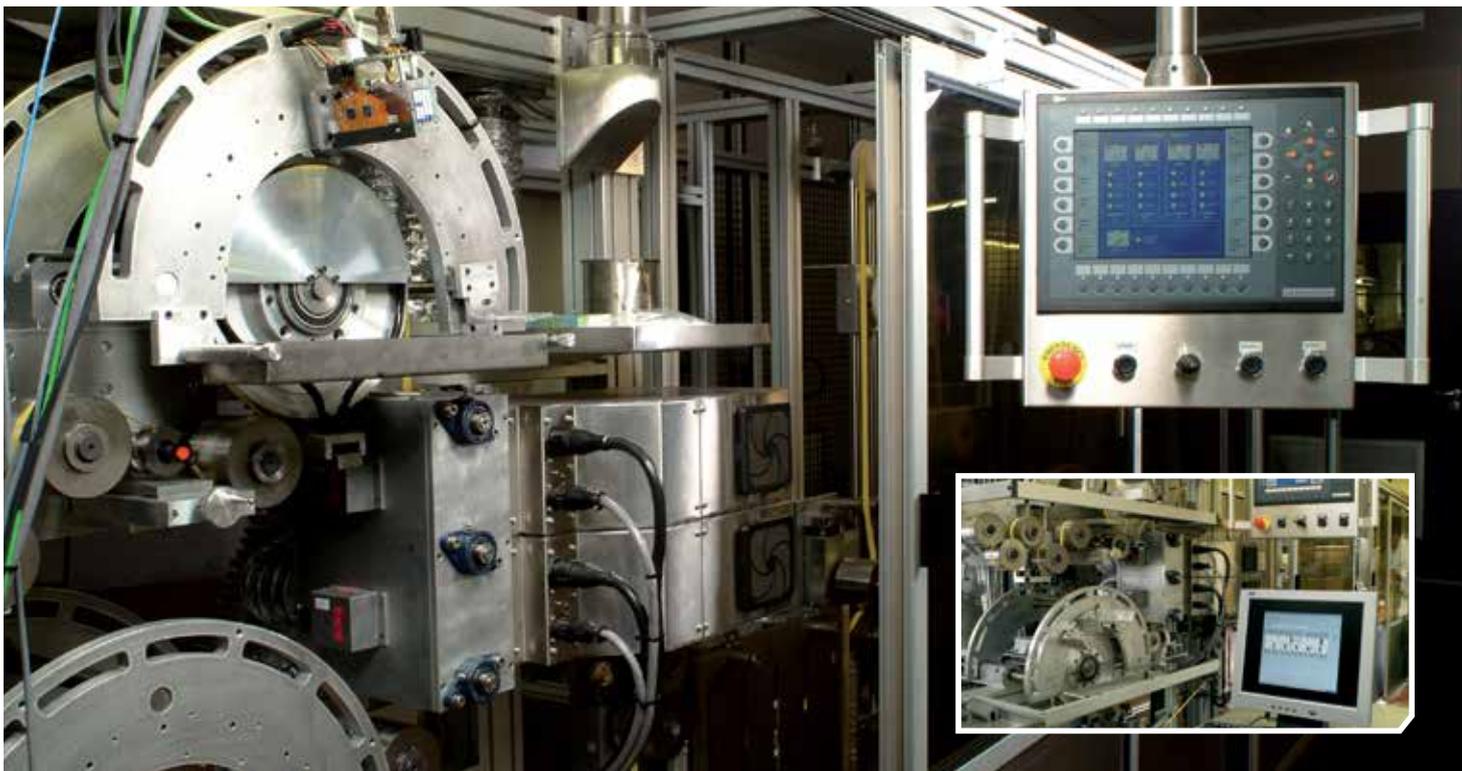

ACCURACY

needs. Tapes are initially calibrated for their total length. However, additional sections of the tape can be calibrated to determine the exact error of any length of the tape, according to the requirements of individual customers.

CHECK YOUR TAPES PRECISION

Steel Tape Measurement Accuracy

Measurement accuracy is a very important feature of a tape measure. It is measured and stated in the form of a tolerance class. We classify measuring tapes in EC Class I and EC Class II.

Steel Tape Measure Production Tolerances		
Total length (m)	Class I (mm)	Class II (mm)
2	±0.3	±0.7
3	±0.4	±0.9
5	±0.6	±1.3
8	±0.9	±1.9
10	±1.1	±2.3
15	±1.6	±3.3
20	±2.1	±4.3
25	±2.6	±5.3
30	±3.1	±6.3
50	±5.1	±10.3
100	±10.1	±20.3

Offset for measurements (including end hook):

Class I: 0.1mm

Class II: 0.2mm

Changing Lengths

Often we experience significant temperature differences between summer and winter, differences that affect length of a steel tape measure. All tolerances quoted here apply at 20 °C, so it is important to be aware of the measurement deviations for various temperatures.

Length Change for a Steel Tape Measure for Temperature Deviations from 20 °C			
ΔT	10 °C	20 °C	30 °C
Length (m)	Length Change (±mm)		
2	0.2	0.4	0.6
3	0.3	0.6	1.0
5	0.5	1.1	1.6
8	0.9	1.7	2.6
10	1.1	2.1	3.2
20	2.1	4.3	6.4
30	3.2	6.4	9.6
50	5.4	10.7	16.1
100	10.7	21.4	32.1

Length change ΔL is calculated using formula $\Delta L = L \times \Delta T \times \alpha$
 L = tape measure length, ΔT = temperature difference from 20°C.
 α = coefficient of linear expansion (1.07 x 10⁻⁵).


Example: If the outdoor temperature is -10°C the difference is -30°C, and the change will thereby be -2.6mm for a 8m long steel tape.

BLADE VARIATIONS

SHORT TAPES

Matt Coat

Carbon spring steel, hardened, tempered and concaved to enable long extension. Polyester coated for improved abrasive resistance.



LONG TAPES

Matt Coat

Tough, white polyester coated steel tape. Printing is protected by an additional transparent polyester top coating. Resistant to commonly used solvents and abrasion. Tapes are accurate within the accuracy class marked on the tape, at a reference temperature of 20°C, when a tractive force of 50N is applied. This applies at all lengths to be measured.



Tough Coat

Tough, yellow polyester coated steel tape, with an extra thick nylon coating for added protection. Resistant to common chemicals, solvents, abrasion and breakage. Withstands bending, kinking and crushing. Recommended for heavy duty measuring work. Tapes are accurate within the accuracy class marked on the tape, at a reference temperature of 20°C, when a tractive force of 50N is applied. This applies at all lengths to be measured.



Fibreglass

Highly flexible tape, much lighter than steel. Constructed from multiple uni-directional glass-fibre strands embedded in flexible PVC. The tape also incorporates an extra thick PVC coating to offer superior resistance to scuffing and marking. Fibreglass tape is electronically non-conductive when dry, corrosion proof and resistant to breakage and common chemicals. Tapes are accurate within the accuracy class marked on the tape, at a reference temperature of 20°C, when a tractive force of 20N is applied. This applies at all lengths to be measured.



Stainless Steel

A premium quality deep etched stainless steel blade. Suitable for use in areas where solvents and chemicals are heavily used.



SHORT TAPES




SHORT TAPES

A comprehensive range of precision engineered tapes which combine innovative design with advanced technical features to offer an exceptional standard of products. Ranging from high specification professional models to general purpose DIY models, all Fisco tapes are individually checked to maintain the highest standards of accuracy and reliability.



BLADE STYLES

Metric/English

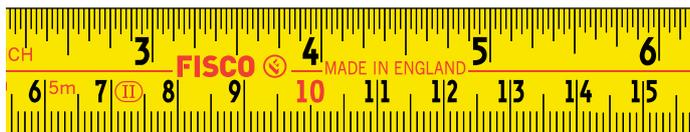


Graduated in centimetres and inches. Red numbers at every foot and 10 centimetres.

EC Class I Metric



Graduated in centimetres. Red numbers at every 10 centimetres. Accurate to EC Class I.

EC Class II Metric

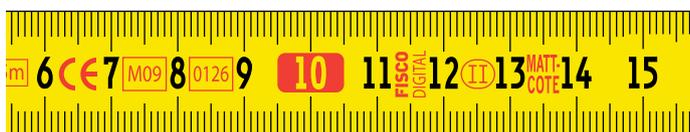

Graduated in centimetres. Red block numbers at every 10 centimetres. Accurate to EC Class II.

SHORT TAPE RANGE TABLE

Use the table below to choose the short tape which best suits your needs.

	Model										
	PR	SL	Big T	Brick Mate	Tri Matic	Tri Lok	Uni Matic	Tuf Lok	Pro Flex	A1-Plus	Video Flex
EC Class											
EC Class I	•	•	•	•	•	•					
EC Class II							•	•	•	•	•
Blade Length/Width Available											
3m x 13mm					•	•		•	•		•
3m x 16mm							•			•	
3m x 19mm	•	•									
5m x 16mm							•				
5m x 19mm	•	•	•			•		•	•	•	
5m x 25mm					•	•				•	
8m x 25mm	•		•	•	•	•		•	•	•	
Features & Benefits											
MADE IN BRITAIN	•	•	•	•	•	•	•		•		•
ABS case		•					•		•		
ABS case with rubber grip	•		•	•		•		•		•	
ABS case with chrome finish					•						
Metal hole hanger for strap	•	•									
Clear-view end-hook			•								
Removable belt clip			•	•				•			
Unique blade scale				•							
Display window in top of case											•

Metric/English blades also available excluding Brick Mate and Video Flex. English only blades available in certain markets on selected models, subject to minimum quantities.

THE NEXT G

PR & SL Short Tapes.

Experience a new dimension of reliable precision and ease of use. Our new hardwearing PR short tapes feature high impact cases of ergonomic design with rubber coating for optimum grip. Pull the steel tape and you'll feel the high-quality precision mechanism. Smooth and silent, distinct brake and gentle return action.

Alternatively, if you prefer things that come in small packages, then our new SL short tape is the one for you. A high-impact slim case which fits perfectly in your pocket, combines hardwearing reliability with ease of use.

MADE IN BRITAIN



PR Measuring Tape

Tough tape with ergonomic grip, rubber coated button and brake pad area, with a high impact case made of ABS plastic. Yellow, wear resistant blade graduated using highly accurate inkjet print. Smooth blade return action and bump stop with anti-wear function.

- EC Class I blade.
- Metal hole hanger for strap enabling safe work at heights.
- Strong stainless steel end-hook with reinforcement plate.
- Distinct brake causing no blade movement.

Model	Length	Class	Blade width
PB3M	3m	I	19mm
PB3ME	3m/10ft	I	19mm
PB5M	5m	I	19mm
PB5ME	5m/16ft	I	19mm
PB8M	8m	I	25mm
PB8ME	8m/26ft	I	25mm

ENERATION



 **MADE IN
BRITAIN**



SL Measuring Tape

Slim model with a high impact case made of ABS plastic. Yellow, wear resistant blade graduated using inkjet print. Smooth blade return action and bump stop with anti-wear function.

- EC Class I blade.
- Metal hole hanger for strap enabling safe work at heights.
- Strong stainless steel end-hook with reinforcement plate.
- Distinct brake causing no blade movement.

Model	Length	Class	Blade width
SL3M	3m	I	19mm
SL3ME	3m/10ft	I	19mm
SL5M	5m	I	19mm
SL5ME	5m/16ft	I	19mm

Short Tapes

BIG T

Innovation at its very best. Hundreds of hours of research amongst builders, carpenters and many other professionals helped to develop the Big T measuring tape which sets new standards in design and technology.



Short Tapes

BRICK MATE

The specialist bricklayers tape



Big T Measuring Tape BT

Probably the world's most advanced measuring tape. Developed based on hundreds of hours of detailed on-site research, looking at every aspect of how professionals measure. The result is a tape with a multitude of user benefits designed for measuring more quickly, easily and reliably.

- EC Class I blade.
- Tough rubber protection with patented shock absorber, designed to survive heavy on-site use.
- Ergonomic case shape is easy to handle and feels moulded to your hand during use.
- Superior brake control with maximum holding power.
- Clear-view end-hook allows the blade to be read right up to the tip.
- Rubber grip tips locates and holds the blade tip firmly.
- Easy 100mm inside measurement make add-ons easy (5m model has flip-out arm).
- Unique snap-in quick-release belt clip holster.

Model	Length	Class	Blade width
BT5M	5m	I	19mm
BT5ME	5m/16ft	I	19mm
BT8M	8m	I	25mm
BT8ME	8m/26ft	I	25mm


* English only blades available in certain markets.



Brick Mate Measuring Tape BM

A specialist tape measure designed to aid professional bricklayers in their work allowing them to set out dry bonds and accurately calculate brick quantities. Use the Brick-Mate for any bricklaying job - big or small - it will save time, effort and money.

- Unique blade design* with three scales to calculate brick & block quantities and course heights along with a conventional metric scale accurate to EC Class I.

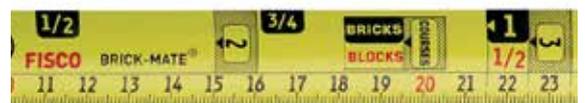

- Ergonomic ABS case with positive action non-slip two part blade lock.
- Unique snap-in quick-release belt clip holster.

Model	Length	Class	Blade width
BMC08	8m	I	25mm

* The unique Brick Mate blade scale is designed for UK brick and block sizes. Subject to minimum order quantities, alternative blade scales can be designed for other markets.



Tri Matic Measuring Tape TM/TW

A range of high specification tape measures designed for the professional user. Exceptionally accurate, durable and reliable.

- EC Class I blade.
- Tough ABS case with chrome finish.
- Positive action non-slip two part blade lock.
- Bump stop for added blade and end-hook protection.
- Triple rivet end-hook on 25mm wide blades and reinforcing plate on 19mm and 25mm wide blades.
- Belt clip and self-zeroing end-hook.

Model	Length	Class	Blade width
TM3M	3m	I	13mm
TM3ME	3m/10ft	I	13mm
TM5M	5m	I	19mm
TM5ME	5m/16ft	I	19mm
TW5M	5m	I	25mm
TW5ME	5m/16ft	I	25mm
TM8M	8m	I	25mm
TM8ME	8m/26ft	I	25mm



Tri Lok Measuring Tape TL/TV

A variation of the popular Tri Matic tape, this exceptionally accurate, durable and reliable tape is ideal for the professional user.

- EC Class I blade.
- Tough grey ABS case with non-slip rubber grip pad.
- Positive action non-slip two part blade lock.
- Bump stop for added blade and end-hook protection.
- Triple rivet end-hook on 25mm wide blades and reinforcing plate on 19mm and 25mm wide blades.
- Belt clip and self-zeroing end-hook.

Model	Length	Class	Blade width
TL3M	3m	I	13mm
TL3ME	3m/10ft	I	13mm
TL5M	5m	I	19mm
TL5ME	5m/16ft	I	19mm
TV5M	5m	I	25mm
TV5ME	5m/16ft	I	25mm
TL8M	8m	I	25mm
TL8ME	8m/26ft	I	25mm



Uni Matic Measuring Tape UM

A compact tape with smooth rounded case, which fits comfortably into the palm of the hand during use. Ideal for both professional and DIY use.

- EC Class II blade.
- ABS case ultrasonically welded for added strength.
- Positive action side lock brake.
- Belt clip and self-zeroing end-hook.

Model	Length	Class	Blade width
UM3M	3m	II	16mm
UM3ME	3m/10ft	II	16mm
UM5M	5m	II	16mm
UM5ME	5m/16ft	II	16mm



Tuf Lok Measuring Tape TK

A tough, multi-protected tape measure, ideal for both professional and DIY use.

- EC Class II blade.
- Tough, ergonomic case with rubber-like outer casing with positive action brake.
- Bump stop for added blade and end-hook protection.
- Removable belt clip (excl. 3m models) and self-zeroing end-hook.

Model	Length	Class	Blade width
TK3M	3m	II	13mm
TK3ME	3m/10ft	II	13mm
TK5M	5m	II	19mm
TK5ME	5m/16ft	II	19mm
TK8M	8m	II	25mm
TK8ME	8m/26ft	II	25mm



Pro Flex Measuring Tape PF/PZ/PW

An excellent value tape measure for both professional and DIY use.

- EC Class II blade.
- Tough red ABS case with positive action brake.
- Bump stop for added blade and end-hook protection (exc. 3m).
- Belt clip and self-zeroing end-hook.

Model	Length	Class	Blade width
PF3M	3m	II	13mm
PF3ME	3m/10ft	II	13mm
PZ5M	5m	II	19mm
PZ5ME	5m/16ft	II	19mm
PW8M	8m	II	25mm
PW8ME	8m/26ft	II	25mm



A1-Plus Measuring Tape AP/AW

An excellent value tape measure ideal for general measuring.

- EC Class II blade.
- Tough ABS case with rubber outer casing.
- Positive action brake.
- Belt clip and self-zeroing end-hook.

Model	Length	Class	Blade width
AP3M	3m	II	16mm
AP3ME	3m/10ft	II	16mm
AP5M	5m	II	19mm
AP5ME	5m/16ft	II	19mm
AW5M	5m	II	25mm
AW5ME	5m/16ft	II	25mm
AP8M	8m	II	25mm
AP8ME	8m/26ft	II	25mm

Also available with magnetic end-hooks

Model	Length	Class	Blade width
AW5M MAGNET	5m	II	25mm
AP8M MAGNET	8m	II	25mm



Video Flex Measuring Tape VF

A specialised tape with a window in the top of the case to display measurements which include the case length, particularly useful for inside measurements.

- EC Class II blade.
- Tough polycarbonate case with window in top to display measurements.
- Push-to-release blade lock.
- Belt clip and self-zeroing end-hook.

Model	Length	Class	Blade width
VF3M	3m	II	13mm

LONG TAPES & SURVEY



LONG TAPES & SURVEY

Combining the very best in terms of design, quality and construction, the Fisco range of long tapes is the professionals' choice in building, engineering and surveying sectors. Specially developed, electronically controlled printing machines guarantee the highest standards of accuracy and precise alignment on dual sided tapes. All Fisco tapes are individually checked to maintain the highest standards of accuracy and reliability.

BLADE VARIATIONS & STYLES


Fisco long tapes are available in a selection of printing styles. The high precision ink-jet tape printer guarantees precise alignment and the highest standards of measuring accuracy.

English style 1 - Available on Matt Coat & Tough Coat




Graduated in feet, inches and 1/8". Red feet, repeats and 16" joist markings.

Metric Style 4 - Available on Matt Coat & Tough Coat



EC Class II. Graduated in mm. Numbered in mm every 10mm. Red metres and repeats.

Metric Style 5 - Available on Matt Coat & Tough Coat



EC Class II. Graduated in mm. Numbered in cm every cm. Red metres and repeats.

Metric Style 6 - Available on Matt Coat & Tough Coat



EC Class I. Graduated in mm. Numbered in cm every cm. Red metres and repeats.

English style 7 - Available on Fibreglass



Graduated in feet, inches and 1/8". Red feet, repeats and 16" joist markings.

Metric Style 9 - Available on Fibreglass



EC Class II. Graduated in cm, numbered every 10cm. Red metres and repeats.

END RINGS AND ZERO POINTS

A Endings: Zero point is approximately 100mm from the end of the tape. Available on metric only tapes.

A1 end-piece: steel end-loop can be specified on all steel single sided metric tapes.

A3 end-piece: engineering grade polymer end-loop can be specified on single sided glass-fibre tapes.

A4 end-piece: triple action engineering grade polymer end-loop with precision fold-in claw and additional hook-on bar.

B Endings: Zero point is at the tape end.


B1 end-piece: steel end-loop can be specified on all steel single sided metric tapes.

B3 end-piece: engineering grade polymer end-loop can be specified on single sided metric only glass-fibre tapes.

B4 end-piece: triple action engineering grade polymer end-loop with precision fold-in claw and additional hook-on bar near zero point of tape.

C Endings: Zero point is at the inside edge of the claw.

C end-piece: pressed steel end-loop normally fitted with stainless steel claw. Available on steel long tapes (with the exception of the Satellite tape which comes with B4 end-piece only), and can also be specified on glass-fibre tapes.

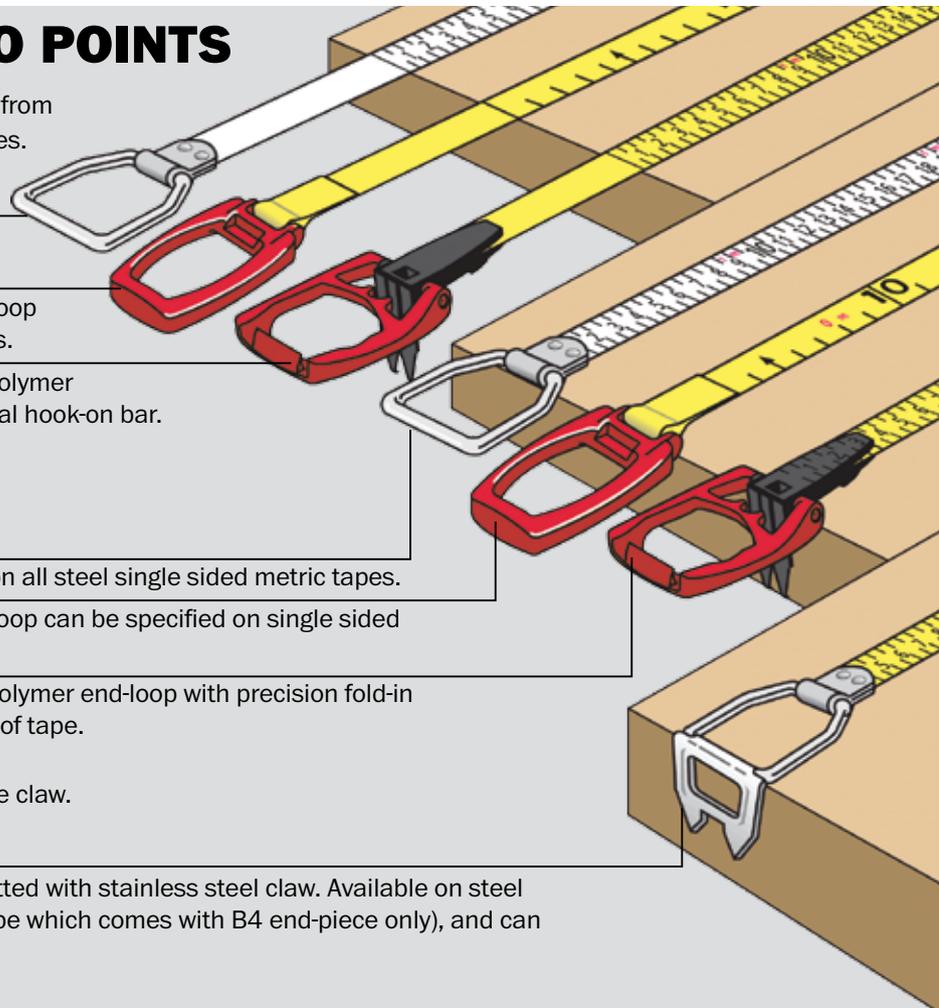

LONG LASTING PRECISION

CC Long Tapes.

Grab our new CC tape measures and feel the amazing grip, optimised for each case size. Add the unique single-hand grip that allows you to just stretch and measure, and the high-quality precision mechanism inside. All in an extremely durable case, designed to take a beating. Superior reliability and easy to use.



 **MADE IN
BRITAIN**



CC Measuring Tape

The CC tapes have a unique one hand grip for each case size enabling optimal handling. Available in a variety of lengths with either matt coat or fibreglass blades. With a solid high-impact case of ABS plastic that have literally been made to take a beating. Unique loop with added features and a mouth-piece with anti-wear function. Hole hanger for strap enabling safe work at heights.

- Matt Coat blades are accurate to EC Class I.
- Fibreglass blades are accurate to EC Class II.
- High impact ABS case with unique hand grip enabling optimal handling.
- The medium size case has a quick rewind function 3:1.
- Hole hanger for strap enabling safe work at heights.

Model	Length	Class	Blade width	Blade type	Case size
CC10/6	10m	I	10mm	Matt Coat	Small
CC10/16	10m/33ft	I	10mm	Matt Coat	Small
CC20/6	20m	I	10mm	Matt Coat	Small
CC20/16	20m/66ft	I	10mm	Matt Coat	Small
CC30/6	30m	I	10mm	Matt Coat	Medium
CC30/16	30m/100ft	I	10mm	Matt Coat	Medium
CX30/6	30m	I	13mm	Matt Coat	Large
CX30/16	30m/100ft	I	13mm	Matt Coat	Large
CX50/6	50m	I	13mm	Matt Coat	Large
CX50/16	50m/165ft	I	13mm	Matt Coat	Large
CC10/9	10m	II	13mm	Fibreglass	Large
CC10/79	10m/33ft	II	13mm	Fibreglass	Large
CC20/9	20m	II	13mm	Fibreglass	Large
CC20/79	20m/66ft	II	13mm	Fibreglass	Large
CC30/9	30m	II	13mm	Fibreglass	Extra large
CC30/79	30m/100ft	II	13mm	Fibreglass	Extra large

SURVEYOR

Advanced Ergonomics.

Probably one of the most advanced, ergonomically designed long tapes, the Surveyor tape sets the gold standard for control, comfort and performance. With a list of great features, this is a highly effective tape for any professional.

The ergonomics of the unique frame design allows the blade to be spooled out smoothly whether walking backwards or forwards, and offers the user comfortable control when measuring. In addition, the high efficiency rewind speed is balanced to a steady walking pace with the user able to choose either the top handle or lower base grip to carry the frame.



Surveyor Measuring Tape SY

The outstanding result of five years of in-depth research and development, the Surveyor sets new high standards for professional tapes. Through stages of rigorous tests and prototyping, a whole series of innovative design features have been incorporated into the high performance tape, exemplified by its distinctive design.

- 13mm Tough Coat blade accurate to EC Class I.
- Impact resistant ABS frame with rubber overmould protection.
- Right and left hand flip-out ergonomic rewind handles.
- Press button blade lock with simple release.
- Rubber grip top handle and lower base grip.
- Integral ground spike for end-hook anchoring.
- Corrosion resistant triple action end-hook.
- Scaled diameter blade drum for balanced rewind speed.
- Easy clean blade feed with side flush apertures.

Model	Length	Class	Blade width	Blade type
SY30/6	30m	I	13mm	Tough Coat
SY30/16	30m/100ft	I	13mm	Tough Coat
SY50/6	50m	I	13mm	Tough Coat
SY50/16	50m/165ft	I	13mm	Tough Coat





Pacer Measuring Tape PY/PR/PJ

Heavy duty, high specification open frame tape designed for the professional user.

- EC Class II blade.
- Impact resistant moulded ABS frame with ground spike.
- High impact polymer centre.
- Low friction bearing for smooth rewind.
- Long winding lever and easy-grip knob.
- Corrosion resistant end-piece.

Model	Length	Class	Blade width	Blade type
PY30/5	30m	II	13mm	Tough Coat
PY30/14	30m/100ft	II	13mm	Tough Coat
PY50/5	50m	II	13mm	Tough Coat
PY50/15	50m/165ft	II	13mm	Tough Coat
PR50/5	50m	II	13mm	Matt Coat
PR50/15	50m/165ft	II	13mm	Matt Coat
PR100/5	100m	II	13mm	Matt Coat
PR100/15	100m/330ft	II	13mm	Matt Coat
PJ100/9	100m	II	13mm	Fibreglass
PJ100/79	100m/330ft	II	13mm	Fibreglass

Available as a 30m or 50m Class I calibrated tape at an extra cost.



Prospector Measuring Tape YC/YR

Heavy duty tape constructed to withstand heavy on site measuring work. The open frame design enables easy cleaning and maintenance.

- EC Class II blade.
- 'Y' shaped aluminium frame with ABS hand grip.
- High impact polymer centre.
- Long winding lever and easy-grip knob.
- Corrosion resistant end-piece.

Model	Length	Class	Blade width	Blade type
YC30/5	30m	II	13mm	Tough Coat
YC30/14	30m/100ft	II	13mm	Tough Coat
YC50/5	50m	II	13mm	Tough Coat
YC50/15	50m/165ft	II	13mm	Tough Coat
YR30/5	30m	II	13mm	Matt Coat
YR50/5	50m	II	13mm	Matt Coat



Tracker Measuring Tape TC/TR

Ruggedly constructed open frame tape ideal for on site measuring. The tape construction enables easy cleaning and maintenance.

- EC Class II blade.
- Corrosion resistant frame with ABS hand grip.
- High impact polymer centre.
- Long winding lever and easy-grip knob.
- Corrosion resistant end-piece.

Model	Length	Class	Blade width	Blade type
TC30/5	30m	II	13mm	Tough Coat
TC30/14	30m/100ft	II	13mm	Tough Coat
TC50/5	50m	II	13mm	Tough Coat
TC50/15	50m/165ft	II	13mm	Tough Coat
TR30/5	30m	II	13mm	Matt Coat
TR30/14	30m/100ft	II	13mm	Matt Coat
TR50/5	50m	II	13mm	Matt Coat
TR50/15	50m/165ft	II	13mm	Matt Coat

Stainless steel blades and dipping tapes with plumb bobs are available on request, subject to availability.



Satellite Measuring Tape ST

Innovative general purpose tape with stylish, ergonomically shaped case designed for easy handling.

- 10mm Matt Coat polyester coated steel tape, accurate to EC Class II.
- Impact resistant moulded ABS case, ultrasonically welded for added strength.
- Easy winding, high impact polymer centre with push button opening handle.
- Unique triple action end-loop with fold-in claw.
- ABS belt clip moulded on to rear of case.

Model	Length	Class	Blade width	Blade type
ST10/5	10m	II	10mm	Matt Coat
ST10/14	10m/33ft	II	10mm	Matt Coat
ST20/5	20m	II	10mm	Matt Coat
ST20/14	20m/66ft	II	10mm	Matt Coat
ST30/5	30m	II	10mm	Matt Coat
ST30/14	30m/100ft	II	10mm	Matt Coat



Futura Measuring Tape FT

General purpose measuring tape with a unique ergonomic case design featuring an integrally moulded hand grip.

- 13mm Fibreglass tape with protective coating, accurate to EC Class II.
- Distinctive ABS case with integral hand grip to keep fingers clear of the winding lever.
- Easy winding, high impact polymer centre.
- Corrosion resistant end-piece.

Model	Length	Class	Blade width	Blade type
FT10/9	10m	II	13mm	Fibreglass
FT10/79	10m/33ft	II	13mm	Fibreglass
FT20/9	20m	II	13mm	Fibreglass
FT20/79	20m/66ft	II	13mm	Fibreglass
FT30/9	30m	II	13mm	Fibreglass
FT30/79	30m/100ft	II	13mm	Fibreglass



Ranger Measuring Tape RN

Ruggedly constructed open frame tape with spade handle grip, ideal for on site measuring.

- 13mm Fibreglass tape with protective coating, accurate to EC Class II.
- Impact resistant ABS frame ultrasonically welded for added strength.
- Twin mouth rollers for smooth rewind and low friction.
- Low friction centre bearing for smooth rewind.
- Long winding lever and easy-grip knob.
- Corrosion resistant end-piece.

Model	Length	Class	Blade width	Blade type
RN30/9	30m	II	13mm	Fibreglass
RN30/79	30m/100ft	II	13mm	Fibreglass
RN50/9	50m	II	13mm	Fibreglass
RN50/79	50m/165ft	II	13mm	Fibreglass

ROAD METER

A robust measuring wheel for professional surveying, highway and site work.

The wheel frame is constructed from high quality polypropylene which is virtually unbreakable and can withstand rigorous use. The spokes are sturdily designed to minimise wind resistance, which makes the Road Meter easy to use in difficult weather conditions. The high visibility yellow offers added safety for highway use.

The tyre is made of an abrasion resistant material which is cast onto the wheel to ensure a close fit, and to maintain the highest level of accuracy. At any point on the tyre the thickness

is exactly 22mm so that the wheel will not tilt or generate variable readings. The cast forks incorporate a pointer for precise recordings.

Balanced centrally over the wheel, the precision counter has large clear reading numbers which can measure up to 10 kilometres in one stretch. The simple zeroing lever enables instant resetting, and the counter can be run backwards to subtract accurately any over-run.

The Road Meter comes equipped with a foot operated folding stand and a brake for start/stop measuring. The dirt remover maintains accuracy during use.



Road Meter Measuring Wheel WH

- Tough, metal gearing and working parts for longevity.
- Belt drive is easier to replace and more durable than other mechanisms.
- Clear reading counter mechanism displays metres and centimetres and has an instant reset lever accurate to 0.1%.
- An extremely tough die-cast fork frame which holds wheel bearings.
- Swivel link folds sideways for quick collapse and packing.
- Integral dirt scraper removes dirt to keep wheel accurate.
- Easy to use foot operated brake which locks the wheel at the required measurement. The folding stand can be steadied by a foot to prevent wheel being blown over by wind or traffic movement.
- Pointer clearly visible for accurate start and end readings.
- Counter range - 9999.99m

Ref. no.	Height	Weight	Circumference
WH10KMC	900mm	2.7kg	1m

HAND TOOLS



AMAZING GRIP, PERFECT CUT

Introducing Handsaws from Hultafors.

Robust design, ergonomic handle and unique tooth profile results in an effective professional saw for the perfect cut. With smart solutions such as exchangeable blades, eco-friendly surface treatment for reduced friction and a stable quick-release blade guard, you can count on a sharp and easy-to-use saw every time.



Handsaw HBS

A standard saw for universal use with a fibreglass reinforced handle, rubber grip and 45° and 90° angle guide.

- The handle is mounted with screws for increased durability.
- The saw blade is made of 1mm thick steel which gives extra stability, precision and low vibrations.
- Hardened teeth with standard 2-phase grinding for efficiency and a long life time. Rotating rewind knob on handle for fast rewinding.

Model	Blade length	Teeth per inch
590724	550mm	7



Handsaw HBX

Handsaw developed for the modern craftsmen in close cooperation with professional users. Hultafors unique teeth's with 3-phase grinding combines efficiency and a good bite with nice straight cuts without chipping.

- The 1mm thick steel blade with a unique eco-friendly wax coating gives less friction and power-consuming side vibrations.
- The durable three-component handle has a comfortable ergonomic grip and 45° and 90° angle guide.
- The handle is mounted to the blade with a stable safety screw which enables changing blade in a simple and reliable way.

Model	Blade length	Teeth per inch
590703	550mm	7
590903	550mm	9
591103	550mm	11

CRAFTSMAN'S KNIVES - ADAPTED TO SUIT YOU.

We have developed a unique series of knives with the help of real experts - professional craftsmen. Knives specially designed according to how craftsmen actually work. Our knife blades are manufactured from high quality Japanese steel. The edges are sharpened in several stages and are finally honed on a leather strop. Both the handle and the sheaths are made of durable polypropylene plastic and are designed with a unique method of attaching the sheath to a button on your work clothes. Our range includes knives with ingenious components that help you in your work and prevent damage to the knife.



Craftsman's Knife HVK

A general purpose knife with a 2.5mm carbon steel blade.

- Both the handle and the sheath are made from durable polypropylene plastic.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380010	93mm	208mm



Craftsman's Knife HVK GH

A general purpose knife with a gripped handle and 2.5mm carbon steel blade.

- The handle and is made from durable polypropylene plastic and fitted with a friction grip.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380210	93mm	208mm



Craftsman's Knife RFR

A general purpose knife with a 2.5mm stainless steel blade.

- Both the handle and the sheath are made from durable polypropylene plastic.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380060	93mm	208mm



Craftsman's Knife RFR GH

A general purpose knife with a gripped handle and 2.5mm stainless steel blade.

- The handle and is made from durable polypropylene plastic and fitted with a friction grip.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380260	93mm	208mm



Heavy Duty Knife GK

A powerful and durable ground knife with a 3mm carbon steel blade. Suitable for coarse work such as prizing, breaking and hacking.

- Both the handle and the sheath are made from durable polypropylene plastic.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380020	94mm	222mm



Chisel Knife STK

Robust knife with v-ground mortise chisel function. 3mm carbon steel blade.

- Both the handle and the sheath are made from durable polypropylene plastic.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380070	72mm	201mm



Painter's Knife MK

A painter's knife with a 2.5mm carbon steel blade, shaped to open paint lids and be used as a slot screwdriver.

- Both the handle and the sheath are made from durable polypropylene plastic.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380040	93mm	208mm



Plumber's Knife VVS

A plumber's knife featuring a file that can be used to remove burrs. 2.5mm stainless steel blade.

- Both the handle and the sheath are made from durable polypropylene plastic.
- The sheath can be attached to both a belt or button on work clothes.

Model	Blade length	Total length
380050	93mm	208mm

CLAMPS TO RELY ON

Professional craftsmen know what a difference it makes when they are truly able to rely on their tools. This is especially true for clamps, which often have to be put into place quickly to hold together, support or stabilise a project. This is exactly what Hultafors' new range of quick clamps and screw clamps are for. Easy to use, ergonomic and durable clamps that guarantee long-lasting reliable clamping forces.



Screw Clamp CFP

Chrome coated die-cast rail has a pivoting handle to provide greater force when tightening or loosening.

- Slim front anvil for increased access in narrow places.
- Strong flat threaded, black phosphate screw with tilted pressure plate.

Model	Clamping cap.	Throat depth	Rail dimensions	Weight
522203	200mm	100mm	19.5 x 9.5mm	1050g
522253	250mm	120mm	22 x 10.5mm	1400g
522303	300mm	140mm	25 x 12mm	1950g
522403	400mm	175mm	27 x 13mm	2600g



Screw Clamp CF

Steel rail forged in one piece, profiled, nickel and chrome plated with wooden handle.

- Slim front anvil for increased access in narrow places.
- Strong flat threaded, black dyeing screw with tilted pressure plate.

Model	Clamping cap.	Throat depth	Rail dimensions	Weight
523103	100mm	50mm	11.5 x 5.7mm	200g
523123	120mm	60mm	13.5 x 6.5mm	300g
523163	160mm	80mm	16 x 7.5mm	500g
523203	200mm	100mm	19.5 x 9.5mm	900g
523253	250mm	120mm	22 x 10.5mm	1300g
523303	300mm	140mm	25 x 12mm	1900g
523403	400mm	120mm	22 x 10.5mm	1500g
523503	500mm	120mm	22 x 10.5mm	1700g



Screw Clamp CM

A strong clamp with jaws of impact resistant malleable castings and a wooden handle.

- Profiled rail of nickel and chrome plated steel with grooves on both sides to prevent the slider from slipping at fixation.
- Strong flat threaded, black dyeing screw with tilted pressure plate and plastic protective caps.

Model	Clamping cap.	Throat depth	Rail dimensions	Weight
524123	120mm	60mm	20 x 5mm	450g
524163	160mm	80mm	25 x 6mm	750g
524203	200mm	100mm	27 x 7mm	1150g
524253	250mm	80mm	25 x 6mm	850g
524263	250mm	120mm	29 x 9mm	1500g
524303	300mm	120mm	29 x 9mm	1600g
524313	300mm	140mm	32 x 10mm	2050g
524403	400mm	140mm	32 x 10mm	2250g
524413	400mm	175mm	32 x 10mm	2350g
524503	500mm	120mm	29 x 9mm	1950g



Quick Clamp QCX

Compact one-hand clamp made of fiberglass-reinforced nylon. Steel rail forged in one piece, with a slim front jaw for increased access in tight places. Clamping force up to 100 - 120kg.

- Reversible rail converts the clamp to a spreader.
- Pressure plates with tracked rubber pads to protect the surface and provide increased clamping force.
- Design with focus on compact and slim operation.

Model	Clamping cap.	Throat depth	Rail dimensions	Weight
521153	150mm	95mm	20 x 6mm	650g
521303	300mm	95mm	20 x 6mm	800g
521453	450mm	95mm	20 x 6mm	920g
521603	600mm	95mm	20 x 6mm	1050g



Quick Clamp QC

One-hand clamp made of fiberglass-reinforced nylon. Steel rail forged in one piece, with a slim front jaw for increased access in tight places. Clamping force up to 60 - 70kg.


- Reversible rail converts the clamp to a spreader.
- Pressure plates with tracked rubber pads to protect the surface and provide increased clamping force.
- Design with focus on compact and slim operation.

Model	Clamping cap.	Throat depth	Rail dimensions	Weight
520153	150mm	75mm	20 x 6mm	600g
520303	300mm	75mm	20 x 6mm	710g
520453	450mm	75mm	20 x 6mm	850g
520603	600mm	75mm	20 x 6mm	980g

EXTREME STRENGTH, PERFECT PRECISION.

Introducing the HDC Chisels.

Using the HDC chisel for the first time, you will immediately feel how the power is transmitted to the workpiece. Forged in a single piece, this chisel has a unique uniform steel construction. The robust design also gives this chisel extreme durability, outstanding strength and impact resistance.

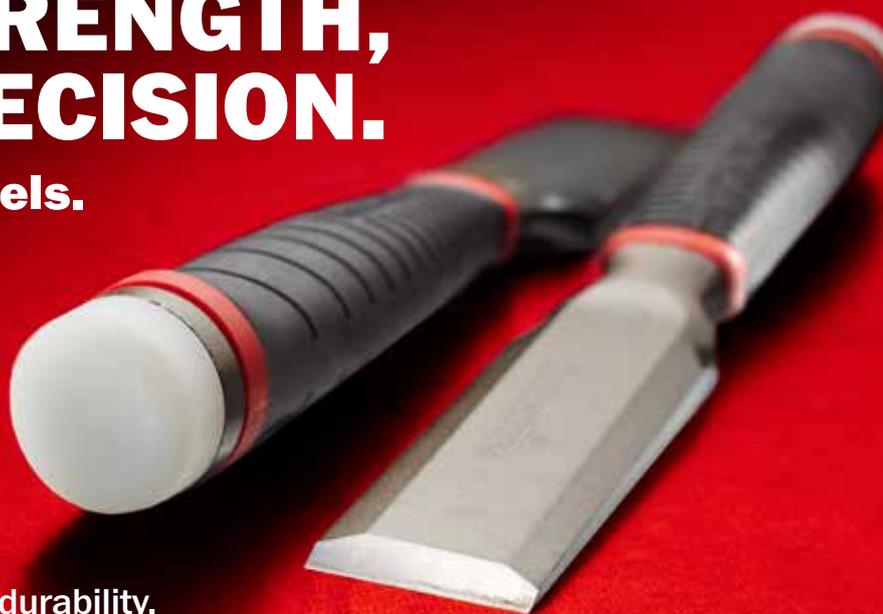

Chisel HDC

Forged in one piece with an I-beam for extreme durability and to maximize the force transmission down to the work piece. A perfect ground blade, bevelled at 25° for the best possible ratio of sharpness and durability. The entire chisel including the handle can be positioned flat against the surface for expanded uses.

- Ideal for tasks requiring extreme strength and precision.
- Smart holster for protection and easy access.
- Replaceable nylon striker available as a spare part.

Model	Blade width	Total length
390263	20mm	265mm
390273	25mm	265mm
390283	32mm	265mm
390293	40mm	265mm



SCANDINAVIAN BUTT CHISELS

Think of it as your new everyday friend. Sharp, reliable and always at hand. Hultafors chisels are designed to combine maximum sharpness with hard-wearing durability.

Ready for tough precision and all-round use, from chopping to prying and scraping. Perfectly sharpened Japanese steel blade, heavy-duty handle for hard hammer blows and a smart holster with a clip for easy access at all times.



Chisel EDC

An everyday chisel, sharp, reliable and always at hand. Ready for tough precision and all-round use, from adjusting and fitting to prying and demolishing.

- High-quality Japanese steel blade with heavy duty handle.
- Smart holster for protection and easy access.

Model	Blade width	Total length
390013	6mm	232mm
390023	10mm	232mm
390033	12mm	232mm
390043	16mm	232mm
390053	18mm	232mm
390063	20mm	232mm
390073	25mm	232mm
390083	32mm	232mm



Incannel Gouge IGC

A curved chisel, sharpened on the inside, giving a perfect 11mm radius in one stroke. Ideal when installing lock cases and hinges in wooden doors.

- High-quality Japanese steel blade with heavy duty handle.
- Smart holster for protection and easy access.

Model	Blade radius	Total length
390133	11mm	232mm



Outcannel Gouge OGC

A curved chisel, sharpened on the outside, giving a perfect 8mm radius in one stroke. Perfect for making cable ditches.

- High-quality Japanese steel blade with heavy duty handle.
- Smart holster for protection and easy access.

Model	Blade radius	Total length
390123	8mm	232mm

HAMMERS

Pick up one of our hammers and you'll feel it at once: it just feels right in your hand. Once you've worked with it for a while, we promise that you'll see what makes it stand out from the crowd. Versatile yet powerful and perfectly designed for your work.



Carpenter's Hammer TR

An ergonomically designed hammer, forged in one piece for increased durability with a vibration damping urethane plug. Thin, strong claw that affords easy access without leaving marks. The claw opening and angle give the best possible grip on the nail. Ergonomically designed handle with clear end stop and a secure grip.

- Vibration damping urethane plug.
- Right angle and shape of striking face.
- Steel shaft with I-profile for increased durability.
- Thin, strong claw that affords easy access without leaving marks. In addition, the claw is rounded to prevent it tearing your trousers.
- Straight claw for better access and a longer shaft for more power for more demanding applications.
- Ergonomically designed handle with a clear end stop.

Model	Weight	Handle
820220	740g	X-Large
820240	810g	X-Large



Dead Blow Hammer DB

With the dead blow hammer you can count on all the power you need, but with reduced recoil and without sparks. The dead blow function uses steel bearings to cushion the shock and reduce recoil. The design features soft faces that minimises the risk of leaving marks on the work piece, and a flat area on the head that allows upright storage.

- Soft faces, easy on the work piece.
- Dead blow function uses steel bearings to cushion the shock and reduce recoil.
- Ergonomic handle of fibreglass and grip of Santoprene rubber.
- Non-sparking.
- Flat area on head allows upright storage.

Model	Weight	Handle
823411	570g	Fibreglass
823412	1160g	Fibreglass
823413	1650g	Fibreglass
823414	5700g	Fibreglass

BRICKLAYER'S HAMMER

Introducing TB 600

A well balanced bricklayer's hammer with a narrow straight chisel, nail puller and Hultafors' ergonomically designed handle with a distinct end stop. It has a continuous steel structure that has been forged in a single piece, combined with a tempered striking surface and chisel.



Bricklayer's Hammer TB

An ergonomically designed hammer, forged in one piece for increased durability with a vibration damping urethane plug. Tempered square striking face and a strong ground chisel with a notch for pulling out nails.

- A wide and thin chisel to increase accessibility.
- Long and evenly grinded cone shaped tip.
- Unpainted cone and chisel to avoid discoloration.

Model	Weight	Handle
822281	900g	Steel



Electrician's Hammer EL

A versatile hammer with U-shaped striking face. The U-shape makes it possible to work close to ceilings and corners without leaving marks on surrounding surfaces. Ideal for working in confined spaces.

- The U-shaped head makes it possible to work close to ceilings and corners.
- The straight claw makes it easy to get at and remove nails and clamps in confined places.
- Ergonomically designed handle for good grip along the entire handle, regardless of power or precision.

Model	Weight	Handle
820040	550g	Steel



Nail Puller ATLE

A versatile and easy-to-use nail puller. Despite its small size, it can easily pull out a 5-inch nail, even when the head is off or buried deep in the wood.


- You use it together with your carpenter's hammer and pull using the claw.
- Made from red painted steel.

Model	Weight
820030	600g

AXES

FORGED WITH TRADITION

Our axes have been crafted in the traditional way since 1697. The axe heads are forged from Swedish axe steel of a consistently high quality. The steel is struck many times until the axe attains its final form. This increases the density of the steel and thereby the durability and life of the axe. Our hardening method leaves a clear hard zone within which the axe can be sharpened whilst not detracting from the strength of the edge. Used correctly, our axes can last for generations.

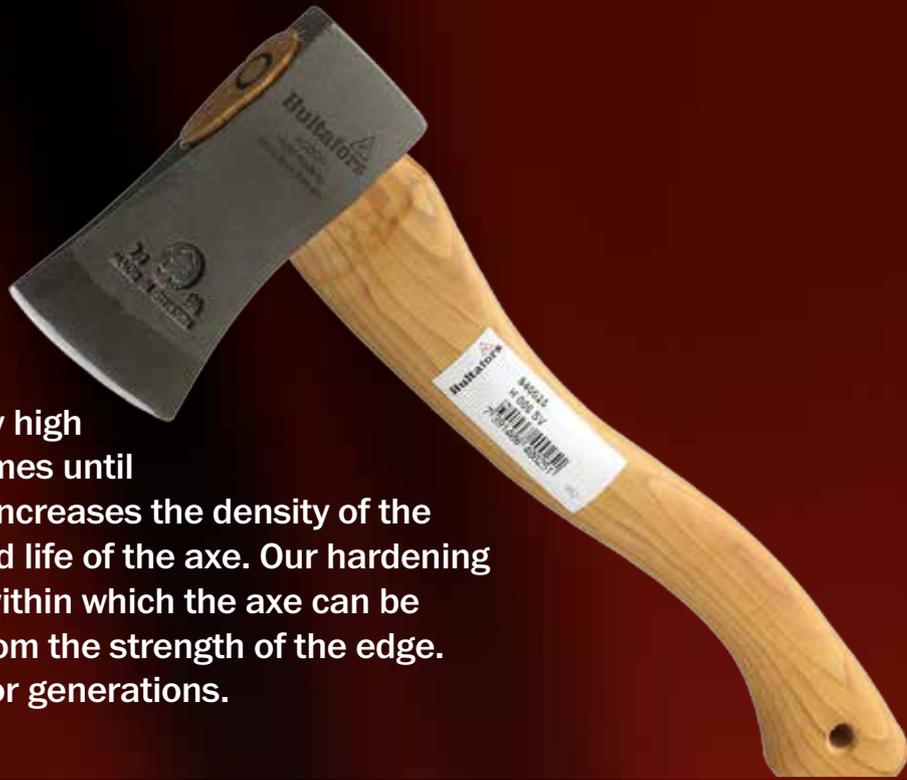

Axes



Trekking Axe

A small axe for outdoor life in forests and open land. Manufactured in blasted and clear-lacquered ironwork, which is also suitable for work in the garden.

- The wooden handle is curved and made of hickory and is treated with linseed oil.
- Clear hard zone in which the axe can be sharpened without altering the strength of the cutting edge.

Model	Weight	Handle
840066	800g	Hickory
840086	900g	Hickory



Chopping Axe HY

An axe suitable for small-scale felling, the shaft is curved and made from hickory. Particularly suitable for lopping branches or clearing bushes and brushwood.

- The steel is stuck several times, increasing its density and thereby the durability of the axe.
- Has a clear tempered zone within which the axe can be sharpened whilst not detracting from the strength of the edge.

Model	Weight	Handle
840108	1000g	Hickory
840144	1200g	Hickory
840185	1500g	Hickory
840205	1750g	Hickory
840206	1750g	Hickory
840281	850g	Hickory



Classic Trekking Axe Mini

Our smallest outdoors axe, perfect for packing in a rucksack, the axe can also be worn on a belt. An edge protector is included with the axe.

- Has a clear tempered zone within which the axe can be sharpened whilst not detracting from the strength of the edge.

Model	Weight	Handle
840760	500g	Hickory



DEMOLISH WITH QUALITY

THE AWARD WINNING ADJUSTABLE WRECKING BAR

Facilitate your work, step by step, with this advanced wrecking bar made of high-quality steel. It's adjustable in nine steps to ensure an optimum working position which allows you not only to wreck and pull out nails, but also easily break up wooden floors, lift doors or adjust construction framework.



Adjustable Wrecking Bar 209 SB

Wrecking bar manufactured in high quality steel with ergonomic rubber-clad handle. Articulated claw, adjustable to nine different positions. Wide, ground contact surfaces and thin ends make it easy to use and reduce the risk of leaving marks.

- Adjustable claw in nine steps for best working position.
- The curved section at the chisel makes space for the hand and minimizes the risk of crushing damage.
- Optimised claw for pulling out nails.
- Secure strap function.

Model	Length	Weight
824115	640mm	1730g



Steel Wrecking Bar 108

A small, versatile steel wrecking bar that can be used for pulling out nails and for breaking, scraping and lifting.

- Has three different functions for pulling out nails.
- Can be used for breaking, scraping and lifting.

Model	Length	Weight
827013	380mm	650g



Mini Steel Wrecking Bar 108

A small, useful steel 7.5" wrecking bar that can be used to pull small nails, remove wood strips or to open cans.

- Has three different functions for pulling out nails.
- Thin contact surfaces make it easy to use in narrow spaces.

Model	Length	Weight
827023	190mm	77g



Plasterer's Adjustable Square PS

Adjustable plaster square with millimeter and degree graduations that can be set in four fixed positions. The stock and blade can be folded together, making it easy to store and transport and also be switch between right and left position.

- The foldable function makes storage and transport easier.
- 4 angles with fixed positions (22,5°, 45°, 67,5°, 90°).
- Additional 21 angles marked on the scale.
- Stock and blade in anodized aluminium.

Model	Blade Length	Stock	Graduations
253501	1200mm	Aluminium	mm/degree



Combination Squares

A versatile range of instruments which combines the functions of outside and inside try square, mitre square, depth and marking gauge, spirit level and plumb level, steel rule, straight edge and scriber.

No.52

- Precision cast zinc stock.
- Stainless steel blade with deep etched graduations.
- Steel scribing pin.



No.53

- Heavy duty precision cast iron stock.
- Stainless steel blade with deep etched graduations.
- Steel scribing pin.



No.56

- Precision cast zinc stock.
- Stainless steel blade with deep etched graduations.
- Steel scribing pin.



No.58

- Precision cast zinc stock.
- Stainless steel blade with deep etched graduations.
- Centre marker and graduated protractor which turns through 360°.
- Steel scribing pin.

Model	Blade length	Stock	Graduations
52SI	300mm	Zinc	mm
52ME	30cm/12"	Zinc	mm/inch
53SI	300mm	Iron	mm
53ME	30cm/12"	Iron	mm/inch
56ME	15cm/6"	Zinc	mm/inch
58SI	300mm	Zinc	mm
58ME	30cm/12"	Zinc	mm/inch

Rafter Square

A lightweight rafter square, ideal for calculating and measuring angles for roof construction.

- Structural foamed polystyrene body.
- Calculates rafter angles.
- Can be used as 90° or 45° mitre square.
- Imperial and degree scales.



Model	Length	Graduations
X55E	7"	inch/degrees



Surveyors Rod SR

A professional six-fold wooden rule ideal for measuring in restricted areas or when working single handedly. The surveyors rod remains rigid when extended.

- Professional quality.
- Cold rolled steel strip hinges treated with hypoid oil for longer life.
- Hardwearing, moisture resistant finish.
- Precisely inscribed and permanent graduations.

Model	Length	Width	Graduations
SR2M	2m	24mm	mm
SR2ME	2m/6ft	24mm	mm/inch



Bench Rule BR

A professional grade rule which can be permanently fixed to a bench top, ideal for estimators, craftsmen and anyone selling materials by length.

- Professional quality.
- Hardwearing, moisture resistant finish.
- Precisely inscribed and permanent graduations.

Model	Length	Width	Graduations
BR1ME	1m/3ft	25mm	mm/inch

Available as a Government stamped bench rule (additional cost applies)



Craftsman's Rule XFB

An engineering quality, white, four-fold rule for detailed marking out.

- Engineering quality.
- Made from Polycarbonate.
- Bevelled edges for precise marking.
- Precisely inscribed and permanent graduations.

Model	Length	Width	Graduations
XFB1ME	1m/3ft	36mm	mm/inch



Handyman's Rule XFY

A general purpose four-fold rule for home, workshop and trade use.

- Made from ABS plastic.
- Brass hinged pins and end-pieces for extended life.
- Precisely inscribed and permanent graduations.

Model	Length	Width	Graduations
XFY1ME	1m/3ft	32mm	mm/inch



Stainless Steel Rules

Universal tools for DIY, workshop and engineering use.

- Top quality stainless steel.
- Deep etched graduations.

Model	Length	Width	Graduations
X706-S	150mm/6"	15mm	mm/inch
X712-S	300mm/12"	25mm	mm/inch
X725-S	610mm/24"	30mm	mm/inch



Giant Chalk Line

A heavy duty ranging line specifically designed for the construction industry, featuring a lockable handle to secure the line at the desired length.

- Yellow polypropylene body with easy grip handle.
- Lockable winding handle.
- 3mm braided line for added strength
- Corrosion resistant end-piece.

Model	Length	Weight	Line thickness
C1-060	50m/165ft	610g	3mm



Roll-Line Ranging Line

Professional high quality ranging line with hard wearing frame and a tough braided line which can be locked at any length.

- Hard wearing grey polystyrene body.
- Long handle to ensure a secure grip.
- 1.5mm braided yellow line, coloured throughout its thickness for superior resistance to UV lights.
- Rotating rewind knob on handle for fast rewinding.
- Detachable hand grip allows insertion into a ranging pole.
- Two locking positions to lock line at any length.

Model	Length	Weight	Line thickness
C4-100	100m/330ft	240g	1.5mm



Chalkline CLP

Advanced ergonomic design combined with cutting-edge functionality makes precision marking easier than ever. Simply fill it up and snap, over and over again.

- Overload protection reducing the risk of damaging the gear mechanism and the line to break.
- Gear function 3:1, rewinds the line 3 times faster.
- Braided line with high absorbing chalk capacity - up to 10 distinct lines.
- Release function in open and closed crank position. (Crank will not spin when pulling out line).
- Contains 100g of chalk.

Model	Length	Weight
652113	30m/100ft	205g



Carpenter's Pencils SNP

Carpenter's pencil made from linden wood with a medium-hard lead (HB), for optimal function on wood, plaster and other soft materials.

- Easy to sharpen as linden is a softwood with few transversal fibres.
- Medium-hard lead (HB) for optimal function on wood, plaster and other soft materials.

Model	Length	Hardness
650207	180mm	HB
650707	180mm	HB
650407	240mm	HB

Concrete Pencil **BEP**

Concrete pencil made from linden wood with a very hard lead. Ideal if you need to mark hard surfaces such as stone and concrete.

- Easy to sharpen as linden is a softwood with few transversal fibres.
- Very hard lead (10 H) for optimal function on hard surfaces such as stone and concrete.

Model	Length	Hardness
650307	300mm	10H

Our chalkline chalk is finely milled so that it effectively attaches to the line and is pigment-rich, which produces a clear and long-lasting line. Available in a number of different colours for use on various materials and in different environments.

Chalkline Chalk **RED**

This red chalk is an all-round chalk suitable for both indoor and outdoor work.

- Contains dolomite and iron oxide.

Model	Chalk Colour	Weight
652423	Red	100g
652433	Red	360g



Chalkline Chalk **BLUE**

This blue chalk is the most widely used chalk. It can be used for both indoor and outdoor work.

- Contains dolomite and ultramarine.

Model	Chalk Colour	Weight
652523	Blue	100g
652533	Blue	360g



Chalkline Chalk **ULTRABLUE**

This ultrablue chalk is optimised for outdoor use. It provides a strong, clear line that is extremely resistant to the effects of wind and rain.

- Contains dolomite and ultramarine.

Model	Chalk Colour	Weight
652633	Ultra Blue	400g



Chalkline Chalk **YELLOW**

This yellow chalk is particularly suited to use on dark surfaces. It can be used for both indoor and outdoor work.

- Contains dolomite and iron oxide.

Model	Chalk Colour	Weight
652333	Yellow	360g



Chalkline Chalk **WHITE**

This white chalk is the only chalk that can be covered over with paint. Used mostly for indoor work.

- Contains dolomite.

Model	Chalk Colour	Weight
652233	White	360g



The FISCO logo consists of the word "FISCO" in a bold, white, sans-serif font, followed by a circular icon containing a stylized white symbol that resembles a hand holding a tool or a similar mechanical component.The Hultafors logo features a red triangle with the letters "KK" inside, positioned above the word "Hultafors" in a bold, white, serif font.

Fisco Tools Limited

21 Brook Road

Rayleigh

ESSEX SS6 7XD UK

Tel. +44 (0)1268 747074

Fax. +44 (0)1268 772936

Fisco Tools Product Development reserve the right to make improvements and alternatives to products, product ranges and materials without notification and on an ongoing basis.

The content of this publication is subject to copyright and may not be copied or reproduced.

ISSUE: 415

www.fisco.co.uk

